

Specification

Item	Specification
Working principle	Turbo drive
Size	291mm X 336mm X 462mm
Net weight	8.5kg
Animal weight range	0.4 kg-150 kg
Respiratory rate	2-60bpm
I:E	1:1.0-1:4.0
Tidal volume	4-1500 ml
Peak inspiratory pressure	5-50 cmH ₂ O
PEEP	3-20 cmH ₂ O, OFF
Trig. pressure	PEEP OFF: -10~ -1cmH ₂ O, OFF; PEEP ON: -10~ -4cmH ₂ O, OFF
Touch screen	7inch, 1024*600px
EtCO ₂ measuring range	Measuring range: 0mmHg - 114 mmHg
EtCO ₂ sample flow rate	75ml/min

Configuration

Function	Model	R420	R420-Plus	R420-Pro
Smart preset		●	●	●
VCA, PCV and APNEA mode		●	●	●
PEEP		●	●	●
Sidestream EtCO ₂ monitoring		○	●	●
INSP. HOLD remote control		○	○	●

Included ● Excluded ○



R420 Veterinary Electric Turbo Ventilator



Veterinary Ventilation Innovation

Simplify the complexity
and breathe freely

R420 Veterinary Electric Turbo Ventilator

With high-performance turbine drive, R420 ventilator no longer needs drive gas! As a mechanical ventilation device tailored for animals, this is a technological innovation. It is a good solution to the traditional ventilator driven gas consumption problem. In addition, its easy-to-use working modes and comprehensive monitoring of animal ventilation state ensure safe ventilation.



Turbo Drive

Electronically driven by a high-performance turbine, no more driven gas



Multiple alarms

Multiple alarms and clear handling prompts ensure the safety of mechanical ventilation



Precise ventilation

Minimum tidal volume down to 4 mL



PEEP function

Help veterinarians solve low SpO₂ problems during surgery



Smart preset

Once inputting animal weight, smart respiratory parameters can be called up



Auto system leak test

Graphical guidance for quick start




Guard "breathing" safety

Accurate and continuous monitoring of respiratory status, such as airway pressure-time chart, minute volume, EtCO₂, and etc.




Remote control of inspiratory hold

During a CT scan of the chest or abdomen, help the animal to hold the inspiration and complete the CT scan

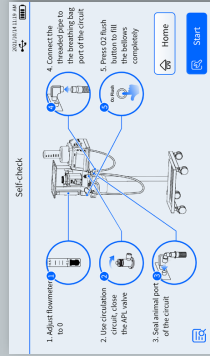


Self-check interface

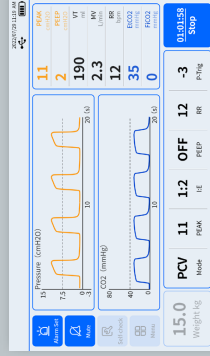

Smart preset



Two size bellows

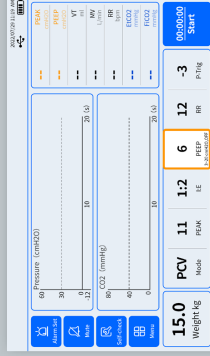

PEEP function



Remote control of inspiratory hold(optional)



Sidestream EtCO₂ monitoring(optional)